



MOST DEFINED



"tube" from Thermo Donut


Accessory Shims

MOST DEFINED





Shims for aligning the façade subframing, especially designed for "tube", same compression strength, same thermal conductivity, available in the following thicknesses: 1,5 mm / 4 mm / 10 mm

1

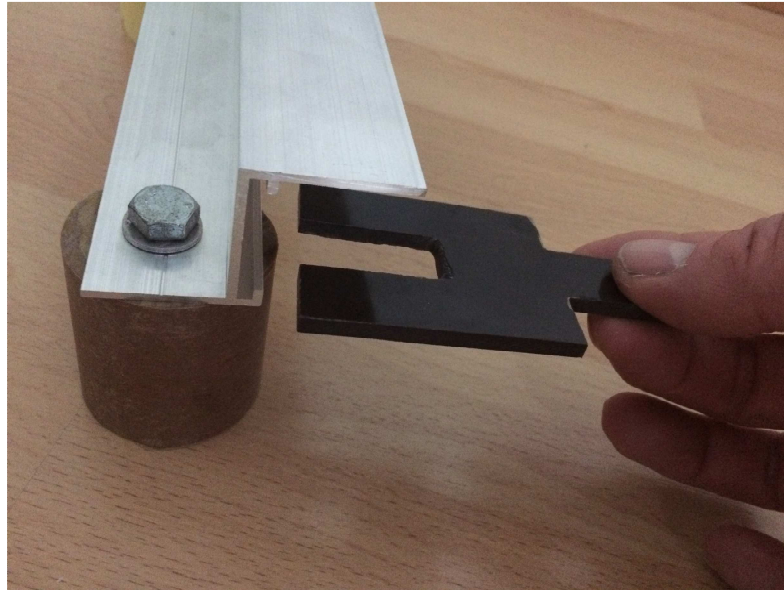


2

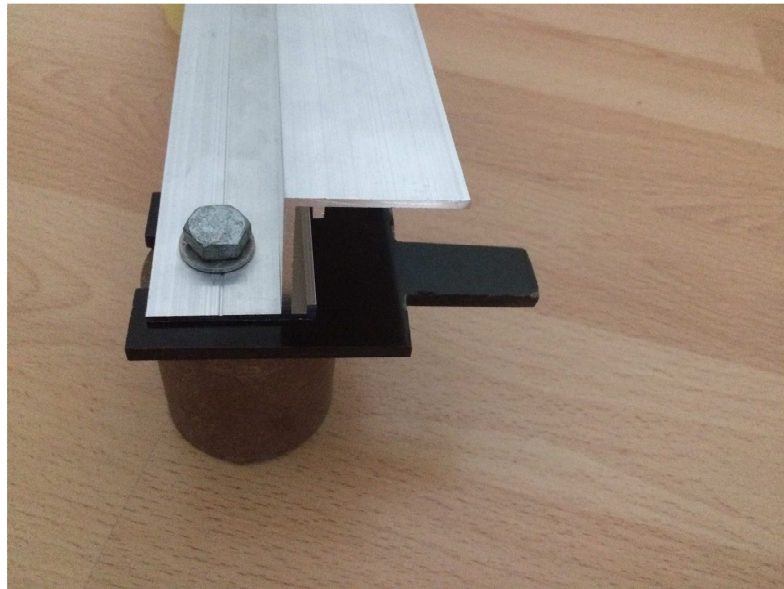




Accessory Shims




shim a) 1.5 mm

measurements in mm

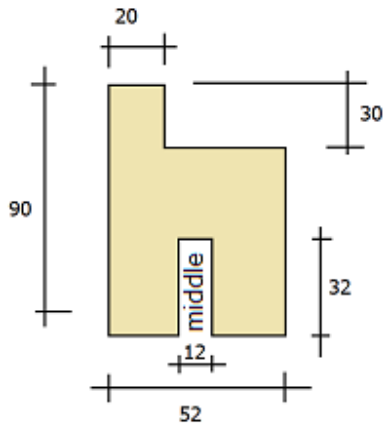

shim b) 4 mm

measurements in mm

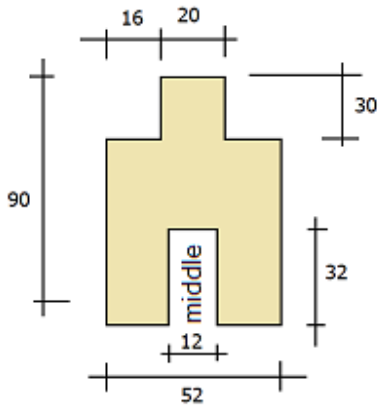

shim c) 10 mm

measurements in mm

